




# Samsung Propel Screen Replacement

Replacing Samsung Propel screen

Written By: Jin

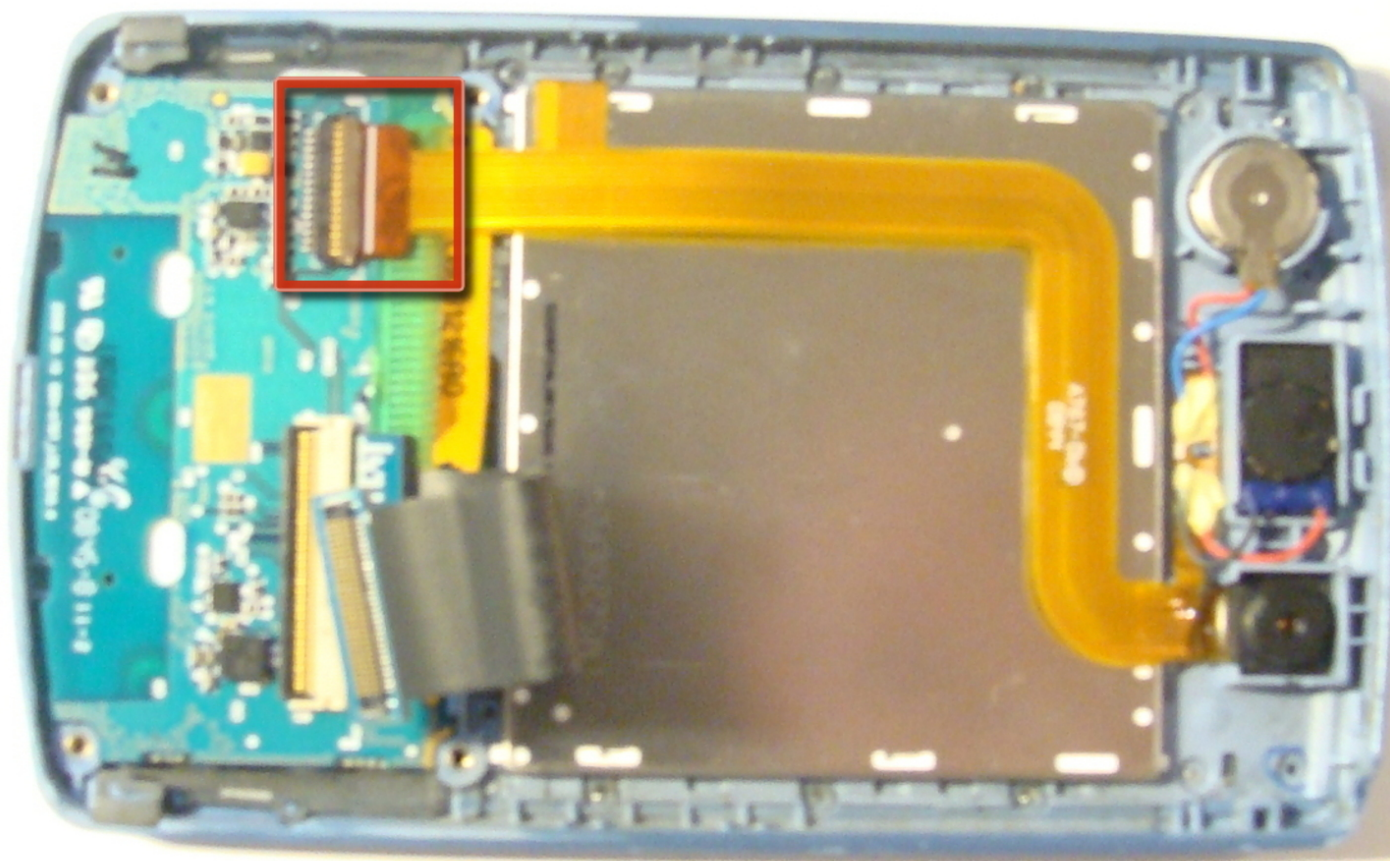

## INTRODUCTION

Use this guide to remove and replace the Samsung Propel screen.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
-

## Step 1 — Battery




- Press down the back and push up to remove back cover.
- Insert finger into gap at the top left and remove battery.

## Step 2 — Motherboard



- Use flat-head screwdriver to remove back lid.

## Step 3

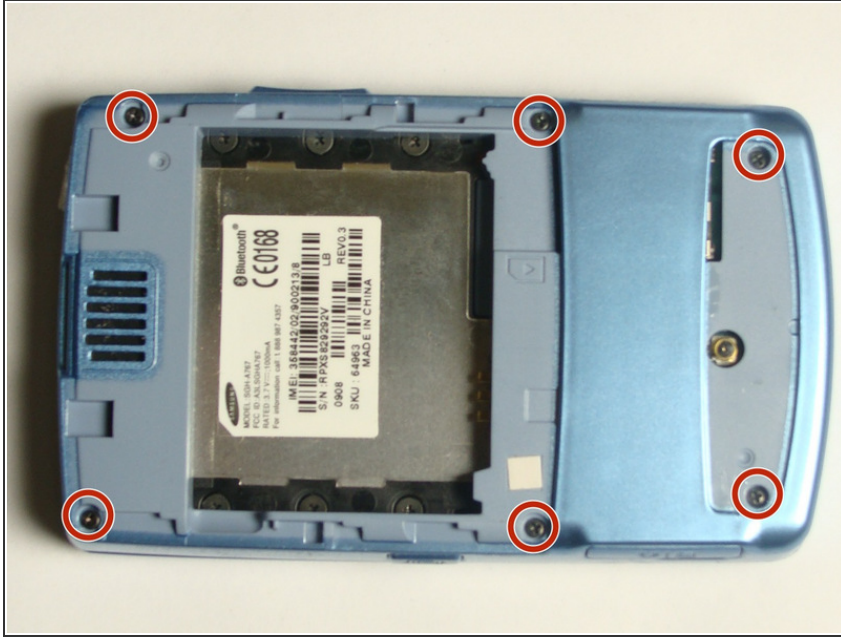

- Locate the six screws and remove them with Phillips #00 Screwdriver.


## Step 4



- Insert the flat-head screwdriver into the crevice.
- Slide and dislodge snap-ons under.
- Remove the back frame.




## Step 5

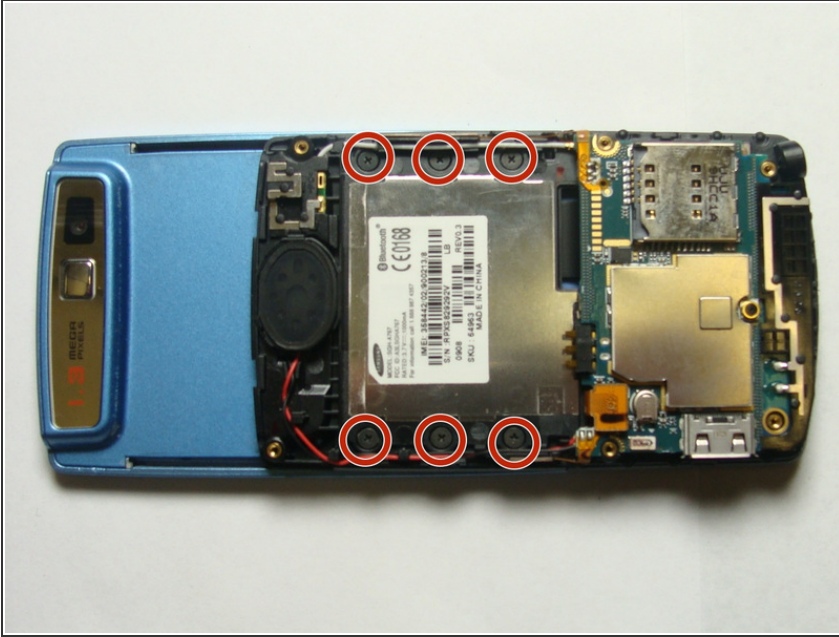

- Locate and remove the six screws with Phillips #00 Screwdriver.
  - Separate the black middle frame from the front frame.
- ⚠ Be careful not to tear the phone bus.

## Step 6

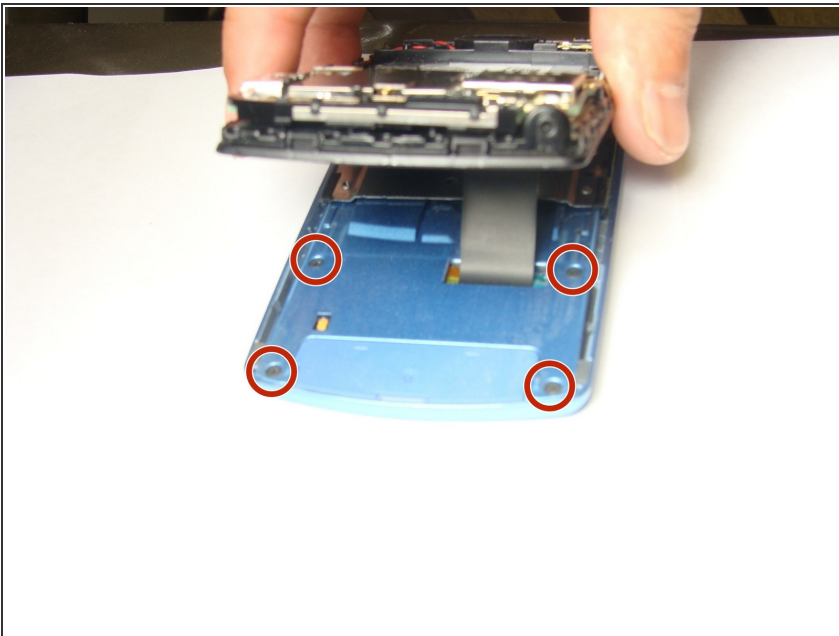

- Locate and remove the four screws with Phillips #00 Screwdriver.


## Step 7



- Insert the flat-head screwdriver into the crevice.
- Slide the flat-head screwdriver and dislodge the snap-ons under.


⚠ Be careful not to rip the band.

## Step 8

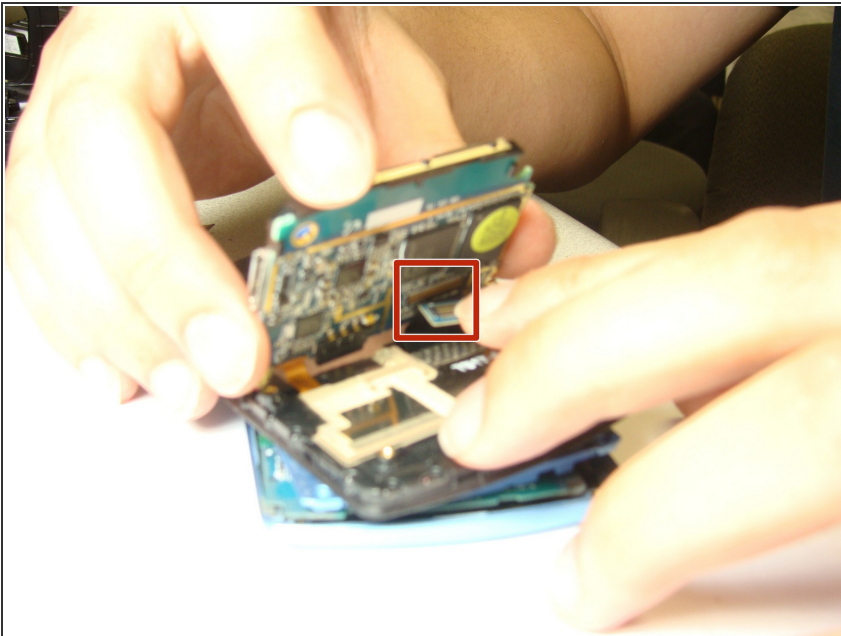

- Use hands to remove both phone buses from the linkages, and remove motherboard.

## Step 9 — Screen

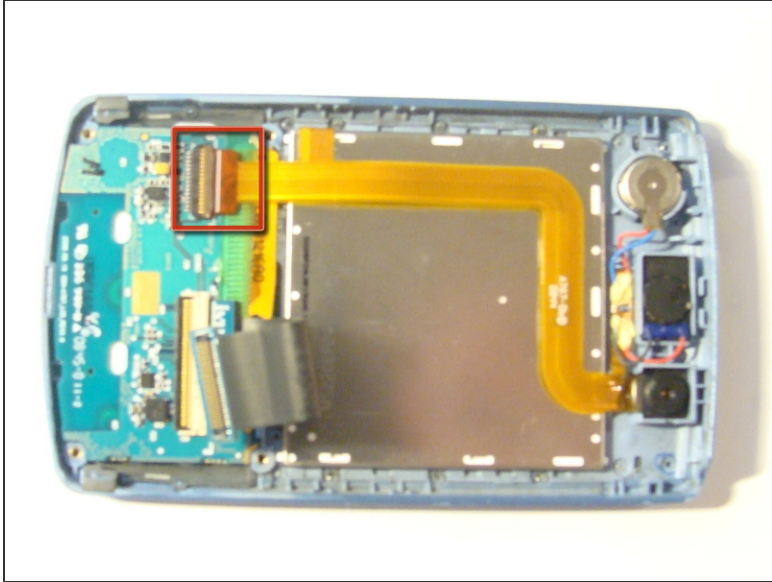

- Flip and pull electric band from input.
- Remove the screen from the front frame.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-06 01:12:10 AM.